

BM..X Eccentric Eddy Current separators Separation system for recycling industries



Always ahead.

Datasheet Bakker Magnetics

BM12X / BM36X (-s) Eccentric Eddy Current separators version 1.5

- Execution : Eccentric nonferrous separator type BM..X
Sturdy construction
Modular design
Including separation unit
control cabinet included
- Driving drum : Ø295mm, crowned
Powered by 4kW SEW engine
- Magnetic rotor : Ø460mm, cylindrical
Powered by 7,5kW SEW engine
Powered by 9,2kW SEW engine (2000mm version)
Built up with strong neodymium magnets; quality
BM35 (optional BM50 magnets)
- Surface treatment : Anti-corrosion primer
Painted blue RAL 5015
Stainless steel parts untreated
- Placement : Protected / covered environment
Machine temperature +5°C ⇔ 40°C.
Relative humidity max. 85%.
Free from dust.

Conform CE label; with certificate.

Bakker Magnetics supplies a complete installation- and user manual in Dutch-, English- or German language (to be specified with order).

- A-brand bearings applied.
- Equipped with a 12 (BM12X) or 18 (BM36X) poles high speed eccentric magnetic rotor.
- Adjustable belt speed; 0,5 - 3 m/s.
- Adjustable rotor speed; 500 – 3.000 rpm.
(2.000mm version max. 2.500rpm).
- Wear resistant PU belt, equipped with 2 side guards.
Optional rubber belt, equipped with 2 side guards.
- Self-adjusting belt track including 2 misalignment switches.
- Manually adjustable belt tension.
- Vibration sensor mounted on the frame to detect unbalance, when detected the system switches off.
- Easy access for quick and easy maintenance.
- Radius-shaped magnets to realise the smallest possible air gap.



Bakker Magnetics

Always ahead.

Control Cabinet (standard with Eddy Current machine)

- Size : 1.200 x 1.000 x 300mm (H x W x D)
- Input : 3x 400V, 50Hz + PE
Through CEE 32 ampere connector
- Main switch : 3 phase 32 ampere
- Bosch frequency converter(s) for magnetic rotor and drive drum
- 2 Additional thermal overload switches, suitable for 1,2 and 5,5 kW engines
(1x 1,6-2,5 ampere (1.2kW motor) and 1x 11-16 ampere (5.5kWmotor))
- Equipped with Siemens PLC
- Equipped with touch panel for local operation

Vibrating feeder (optional)

- Execution : Unbalance vibrating feeder
Sturdy construction
Modular design
- Trough : Made from stainless steel
Placed on Rosta elements
Available lengths; 1500mm or 2500mm
- Drive : Adjustable unbalance engines
Motor brand Italtibras
- Power : Power for 1500mm length versions;
BM..X 800mm 2x0,5kW
BM..X 1000mm 2x0,7kW
BM..X 1500mm 2x0,75kW
BM..X 2000mm 2x1,30kW
- Surface treatment : Anti-corrosion primer
Stainless steel parts blasted
Steel parts painted RAL 5015

Neodymium separating drum (optional)

- Execution : Separating drum type TM
Mounted on a frame
Sturdy construction
Modular design
Permanent magnetic
- Drum : Ø315mm, stainless steel 1.4301, with 2 idlers
- Surface treatment : Untreated
- Magnetic part : Magnetic area approx. 180°
Permanent Neodymium magnets quality BM35



Standard version (BM12X / BM36X (-s))

Article number	A	B	C	D	E	F	G	H	I
29.743/...	800	1610	3000 / 4000	1500	1135	1462	1175	480	2175
29.744/...	1000	1810	3000 / 4000	1500	1135	1462	1175	480	2175
29.746/...	1500	2310	3000 / 4000	1500	1135	1462	1175	480	2175
29.747/...	2000	2810	3000 / 4000	1500	1135	1462	1175	480	2175

Sized mentioned based on a feeder length of 1500mm

Sizes and dimensions (in mm) as shown on the drawing on the last page.

For more information or questions please contact us:

Bakker Magnetics

Sciencepark Eindhoven 5502
5692 EL Son, The Netherlands

Division: Magnetic Separation Technology

Phone : +31 (0) 40 2 678 840


Mail : mst@bakkermagnetics.com

Dimensions and shape of the magnet, in combination with required manufacturing processes, may cause the magnetic and physical characteristics to vary from typical values. Therefore, all data presented in this document are for general reference only and should not be relied upon to represent standard characteristics, nor are they guaranteed upon use. Bakker Magnetics reserves the right to change information in this document, including magnet performance standards, specifications, and characteristics without notice.



Bakker Magnetics

Always ahead.

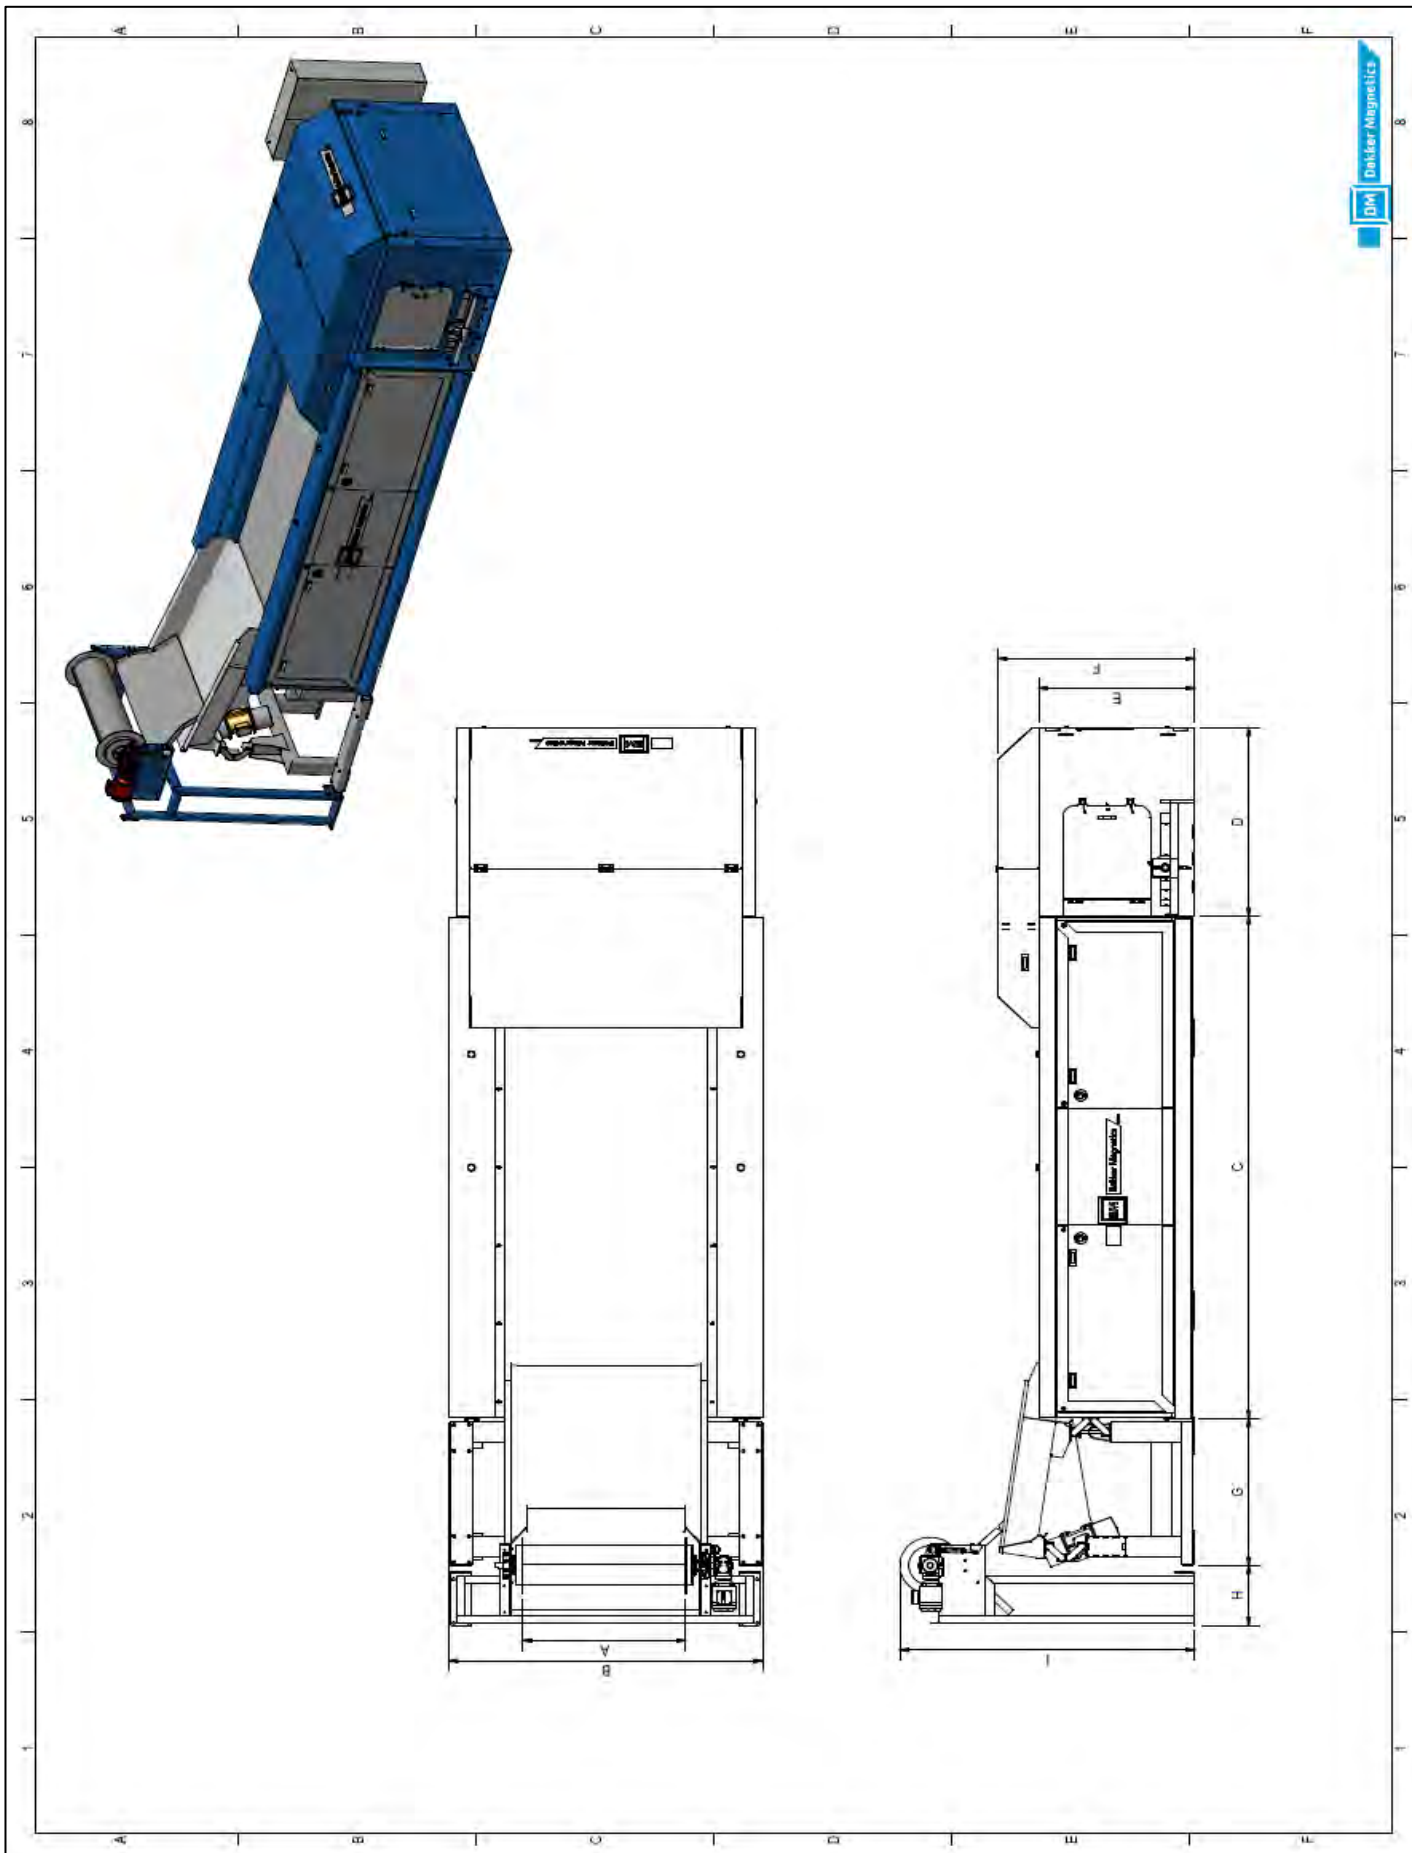

BM12X / BM36X (-s) Eccentric Eddy Current separators

Spare part list

Standard spare parts

Article number	Description	Number per ECSM
7078	Bearing, SKF 22212 EK/C3	2
7167	Chain Simplex 5/8" 52 left	1
7187	Chain endlink 5/8" 1623-E-26	1
7166/1	Chain sprocket single 5/8" z=19	2
7169	Chain tensioner Rosta P5/8" -10S	1
7080	Clamping bush SKF H-312-XNTN (D50X47)	2
7099	Clamping unit Taperlock D38MM	1
7094	Clamping unit Taperlock D50MM	1
7225	Distance ring SKF ZW 90X110 SKF	2
11282	Drive belt Optibelt HTD-8M-030-1760	1
7185	Flangebearing INA PCJTY 45	2
10340	Side roller belt D50X150MM	2
8062	Switch misalignment Kiepe VG-03/5	2
7168	Tension element Rosta SE-F18 M8/F-350N	3
7182	Tensionroller Rosta R15/18-40	2
7183	Drivesprocket HTD 48-08M30 TB2012	2

Depending on the machine width (standard execution)

Machine type	Width	Sleeve	PU belt	Rubber belt
29.743/..	800	11569/1	11573/800	11573/800/48
29.744/..	1000	11834/1000	11573/1000	11573/1000/48
29.746/..	1500	11834/1500	11573/1500	11573/1500/48
29.747/..	2000	11834/2000	11573/2000	11573/2000/48

Standard spare rotor for BM12X / BM36X (-s)

Machine type	Width	BM12X	BM36X	BM36X-s
29.743/..	800	29.743/112	29.743/118	29.743/118/BM50
29.744/..	1000	29.744/112	29.744/118	29.744/118/BM50
29.746/..	1500	29.746/112	29.746/118	29.746/118/BM50
29.747/..	2000	29.747/112	29.747/118	29.747/118/BM50



Bakker Magnetics

Always ahead.